

GE

Energy Connections

Model 500

Split Core Current Transformer Window Sizes Available up to 10"x 30"

Application

Metering.

Frequency

50-400 Hz

Insulation Level

0.6 kV, BIL 10 kV full wave.

Continuous Thermal Current Rating Factor

1.33 at 30 °C. amb.

1.0 at 55 °C. amb.

The accuracy table below is for 500T041 X 117. Accuracy for other sizes are available from the factory. The dimensions in the table at right are standard sizes. Other window lengths (B1) may be accommodated on special order. Window widths (A1) other than those listed are not available.

Model 500

Ratio Number	Ratio	Accuracy Class with U.P.F Burden
301	300:5	5 % @ 1.5VA
401	400:5	3 % @ 2.5VA
501	500:5	2 % @ 2.5VA
601	600:5	1 % @ 4.0VA
751	750:5	1 % @ 5.0VA
801	800:5	1 % @ 5.0VA
102	1,000:5	1 % @ 7.5VA
122	1,200:5	1 % @ 10.0VA
152	1,500:5	1 % @ 12.5VA
202	2,000:5	1 % @ 15.0VA
252	2,500:5	1 % @ 25.0VA
302	3,000:5	1 % @ 25.0VA
352	3,500:5	1 % @ 25.0VA
402	4,000:5	1 % @ 25.0VA
502	5,000:5	1 % @ 30.0VA
602	6,000:5	1 % @ 40.0VA

Terminals are 8-32 brass studs with one flatwasher, lockwasher, and regular nut.

Flexible leads are UL 1015, 105°C, CSA approved, #16 AWG, 24" long are available.

Approximate Weight 8 to 18 lbs.



REGULATORY AGENCY APPROVALS
 E93779  LR89403
 Manufactured to meet the requirements of ANSI/IEEE C57.13.
 Classified by U.L. in accordance with IEC 44-1

Model 500

Dimensions						Max. Ratio
"A1"	"A2"	"A3"	"B1"	"B2"	B3"	
4.1	6.4	7.3	7.1	10.0	10.9	4,000:5
4.1	6.4	7.3	11.7	14.5	15.4	8,000:5
4.1	6.4	7.3	14.1	17.0	17.9	8,000:5
4.1	6.4	7.3	18.1	21.0	21.9	8,000:5
4.1	6.4	7.3	24.0	27.0	27.9	10,000:5
4.1	6.4	7.3	30.1	33.0	33.9	10,000:5
5.1	7.2	8.3	7.1	10.0	10.9	8,000:5
5.1	7.2	8.3	11.7	14.5	15.4	8,000:5
5.1	7.2	8.3	14.1	17.0	17.9	8,000:5
5.1	7.2	8.3	18.1	21.0	21.9	8,000:5
5.1	7.2	8.3	24.0	27.0	27.9	10,000:5
5.1	7.2	8.3	30.1	33.0	33.9	10,000:5
5.8	7.0	9.0	7.1	10.0	10.9	4,000:5
5.8	7.0	9.0	11.7	14.5	15.4	8,000:5
5.8	7.0	9.0	14.1	17.0	17.9	8,000:5
5.8	7.0	9.0	18.1	21.0	21.9	8,000:5
5.8	7.0	9.0	24.0	27.0	27.9	10,000:5
5.8	7.0	9.0	30.1	33.0	33.9	10,000:5
8.0	9.5	11.1	7.1	10.0	10.9	4,000:5
8.0	9.5	11.1	11.7	14.5	15.4	8,000:5
8.0	9.5	11.1	14.1	17.0	17.9	8,000:5
8.0	9.5	11.1	18.1	21.0	21.9	8,000:5
8.0	9.5	11.1	24.0	27.0	27.9	10,000:5
8.0	9.5	11.1	30.1	33.0	33.9	10,000:5
10.1	11.6	13.2	7.1	10.0	10.9	4,000:5
10.1	11.6	13.2	11.7	14.5	15.4	8,000:5
10.1	11.6	13.2	14.1	17.0	17.9	8,000:5
10.1	11.6	13.2	18.1	21.0	21.9	10,000:5
10.1	11.6	13.2	24.0	27.0	27.9	10,000:5
10.1	11.6	13.2	30.1	33.0	33.9	10,000:5





Model 500 Split Model 500 Split Core

This transformer is designed for assembly to an existing electrical installation without the need for dismantling the primary bus or cables.

Caution:

Proper safety precautions must be followed during installation by a trained electrician. Never install while bus is energized. The current transformer must have its secondary terminals short circuited or the burden connected, before energizing the primary circuit

How to Order Rectangular CTs

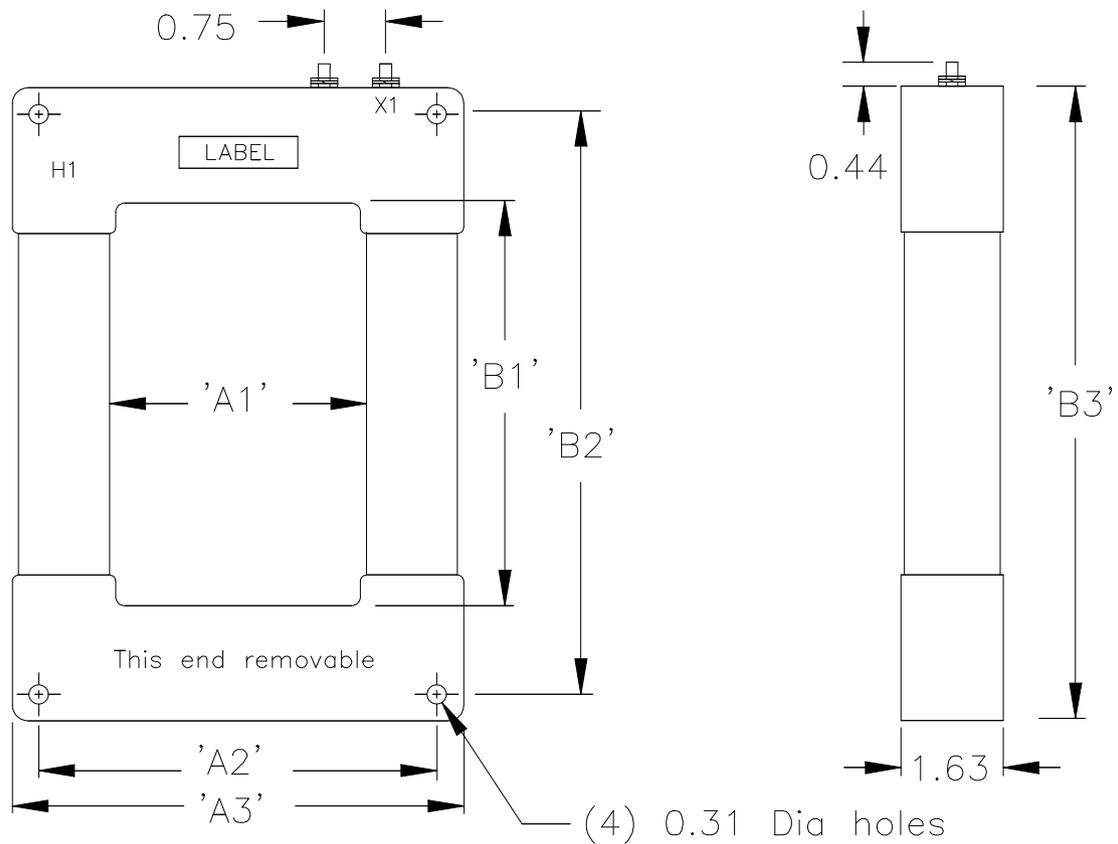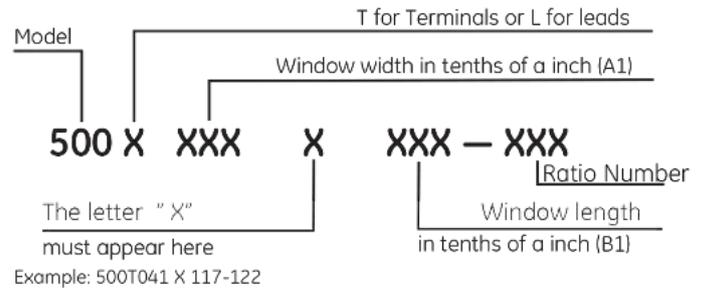

GEGridSolutions.com

Grid-AIS-L4-ITL_Model_500-1554-2017_05-EN. General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

Worldwide Contact Center

Web: www.GEGridSolutions.com/contact

Phone: +44 (0) 1785 250 070

USA and Canada: +1 (0) 800 547 8629

Europe, Middle East and Africa: +34 (0) 94 485 88 00

