

# Models 112, 113, 114, 115 and 117

## Current Transformers Window Diameter 2.25", 2.75", 3.25", 4.00", 4.62"

### Application

Relaying and metering.

### Features

50-400 Hz

### Insulation Level


600 Volts, 10 kV BIL full wave.

Terminals are brass studs No. 8-32 with one flat washer, lock washer and regular nut.

Order mounting bracket kit 0221B01525 separately.

Multi-ratios available upon request.

Excitation data available upon request.

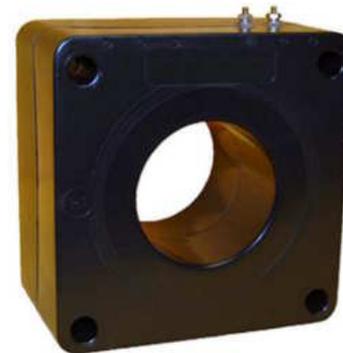

REGULATORY AGENCY APPROVALS  
 E93779  LR89403  
 Manufactured to meet the requirements of ANSI/IEEE C57.13.  
 Classified by U.L. in accordance with IEC 44-1

## Model 112 Window Diameter 2.25"

Approximate weight 25 lbs.

Catalog Number	Current Ratio	Relay Class	ANSI Metering Class at 60 Hz					Continuous Thermal Rating Factor	
			B0.1	B0.2	B0.5	B0.9	B1.8	@ 30 °C	@ 55 °C
112-500	50:5	C10	1.2	2.4	—	—	—	2.0	2.0
112-750	75:5	C20	0.6	1.2	2.4	4.8	—	2.0	2.0
112-101	100:5 *	C20	0.6	0.6	2.4	2.4	4.8	2.0	2.0
112-151	150:5 *	C50	0.3	0.6	1.2	1.2	2.4	2.0	2.0
112-201	200:5 *	C50	0.3	0.3	0.6	0.6	1.2	2.0	2.0
112-251	250:5 *	C50	0.3	0.3	0.3	0.3	0.6	2.0	2.0
112-301	300:5 *	C100	0.3	0.3	0.3	0.3	0.6	2.0	2.0
112-401	400:5 *	C100	0.3	0.3	0.3	0.3	0.3	2.0	1.5
112-501	500:5 *	C100	0.3	0.3	0.3	0.3	0.3	2.0	1.5
112-601	600:5 *	C100	0.3	0.3	0.3	0.3	0.3	1.5	1.33
112-751	750:5 *	C200	0.3	0.3	0.3	0.3	0.3	1.5	1.0
112-801	800:5 *	C200	0.3	0.3	0.3	0.3	0.3	1.5	1.0
112-102	1000:5 *	C200	0.3	0.3	0.3	0.3	0.3	1.33	1.0
112-122	1200:5 *	C200	0.3	0.3	0.3	0.3	0.3	1.33	1.0

\* Industry Canada approval No. AE-0837



### Model 113 Window Diameter 2.75"

Approximate weight 23 lbs

Catalog Number	Current Ratio	Relay Class	ANSI Metering Class at 60 Hz					Continuous Thermal Rating Factor	
			B0.1	B0.2	B0.5	B0.9	B1.8	@ 30 °C	@ 55 °C
113-500	50:5	C10	2.4	4.8	—	—	—	2.0	2.0
113-750	75:5	C10	0.6	1.2	4.8	4.8	—	2.0	2.0
113-101	100:5	C20	0.6	0.6	2.4	2.4	4.8	2.0	2.0
113-151	150:5	C20	0.3	0.3	0.6	1.2	2.4	2.0	2.0
113-201	200:5 *	C50	0.3	0.3	0.6	0.6	1.2	2.0	2.0
113-251	250:5 *	C50	0.3	0.3	0.6	0.6	1.2	2.0	2.0
113-301	300:5 *	C50	0.3	0.3	0.3	0.6	1.2	2.0	2.0
113-401	400:5 *	C100	0.3	0.3	0.3	0.3	0.6	2.0	1.5
113-501	500:5 *	C100	0.3	0.3	0.3	0.3	0.3	2.0	1.5
113-601	600:5 *	C100	0.3	0.3	0.3	0.3	0.3	1.5	1.33
113-751	750:5 *	C200	0.3	0.3	0.3	0.3	0.3	1.5	1.0
113-801	800:5 *	C200	0.3	0.3	0.3	0.3	0.3	1.5	1.0
113-102	1000:5 *	C200	0.3	0.3	0.3	0.3	0.3	1.33	1.0
113-122	1200:5 *	C200	0.3	0.3	0.3	0.3	0.3	1.33	1.0
113-152	1500:5 *	C200	0.3	0.3	0.3	0.3	0.3	1.0	0.8

\* Industry Canada Approval No. T-190

### Model 114 Window Diameter 3.25"

Approximate weight 22 lbs.

Catalog Number	Current Ratio	Relay Class	ANSI Metering Class at 60 Hz					Continuous Thermal Rating Factor	
			B0.1	B0.2	B0.5	B0.9	B1.8	@ 30 °C	@ 55 °C
114-500	50:5	C10	2.4	4.8	—	—	—	2.0	2.0
114-750	75:5	C10	1.2	2.4	4.8	—	—	2.0	2.0
114-101	100:5	C10	1.2	1.2	2.4	4.8	—	2.0	2.0
114-151	150:5 *	C20	0.6	0.6	1.2	2.4	4.8	2.0	2.0
114-201	200:5 *	C20	0.3	0.3	0.6	1.2	2.4	2.0	2.0
114-251	250:5 *	C50	0.3	0.3	0.6	1.2	1.2	2.0	2.0
114-301	300:5 *	C50	0.3	0.3	0.6	0.6	1.2	2.0	2.0
114-401	400:5 *	C100	0.3	0.3	0.3	0.3	0.6	2.0	1.5
114-501	500:5 *	C100	0.3	0.3	0.3	0.3	0.6	2.0	1.5
114-601	600:5 *	C100	0.3	0.3	0.3	0.3	0.3	1.5	1.33
114-751	750:5 *	C100	0.3	0.3	0.3	0.3	0.3	1.5	1.0
114-801	800:5 *	C200	0.3	0.3	0.3	0.3	0.3	1.5	1.0
114-102	1000:5 *	C100	0.3	0.3	0.3	0.3	0.3	1.5	1.0
114-122	1200:5 *	C200	0.3	0.3	0.3	0.3	0.3	1.33	1.0
114-152	1500:5 *	C200	0.3	0.3	0.3	0.3	0.3	1.0	0.8
114-162	1600:5 *	C200	0.3	0.3	0.3	0.3	0.3	1.0	0.8

\* Industry Canada Approval No. T-190

## Model 115 Window Diameter 4.00"

Approximate weight 19 lbs.

Catalog Number	Current Ratio	Relay Class	ANSI Metering Class at 60 Hz					Continuous Thermal Rating Factor	
			B0.1	B0.2	B0.5	B0.9	B1.8	@ 30°C	@ 55°C
115-500	50:5	—	2.4	4.8	—	—	—	2.0	2.0
115-750	75:5	—	1.2	2.4	4.8	—	—	2.0	2.0
115-101	100:5	C10	1.2	1.2	2.4	4.8	—	2.0	2.0
115-151	150:5 *	C10	0.6	0.6	1.2	2.4	4.8	2.0	2.0
115-201	200:5 *	C20	0.3	0.6	0.6	1.2	2.4	2.0	2.0
115-251	250:5 *	C20	0.3	0.3	0.6	1.2	2.4	2.0	2.0
115-301	300:5 *	C20	0.3	0.3	0.3	0.6	1.2	2.0	2.0
115-401	400:5 *	C50	0.3	0.3	0.3	0.3	0.6	2.0	2.0
115-501	500:5 *	C50	0.3	0.3	0.3	0.3	0.3	2.0	1.5
115-601	600:5 *	C50	0.3	0.3	0.3	0.3	0.3	2.0	1.5
115-751	750:5 *	C100	0.3	0.3	0.3	0.3	0.3	1.5	1.33
115-801	800:5 *	C100	0.3	0.3	0.3	0.3	0.3	1.5	1.0
115-102	1000:5 *	C100	0.3	0.3	0.3	0.3	0.3	1.5	1.0
115-122	1200:5 *	C100	0.3	0.3	0.3	0.3	0.3	1.33	1.0
115-152	1500:5 *	C100	0.3	0.3	0.3	0.3	0.3	1.0	0.8
115-162	1600:5 *	C100	0.3	0.3	0.3	0.3	0.3	1.0	0.8
115-202	2000:5 *	C200	0.3	0.3	0.3	0.3	0.3	1.0	0.8
115-252	2500:5 *	C100	0.3	0.3	0.3	0.3	0.3	1.0	0.8
115-302	3000:5 *	C200	0.3	0.3	0.3	0.3	0.3	0.8	0.6
115-322	3200:5 *	C200	0.3	0.3	0.3	0.3	0.3	0.8	0.6

\* Industry Canada Approval No. T-192


## Model 117 Window Diameter 4.62"

Approximate weight 13 lbs.

Catalog Number	Current Ratio	Relay Class	ANSI Metering Class at 60 Hz					Continuous Thermal Rating Factor	
			B0.1	B0.2	B0.5	B0.9	B1.8	@ 30°C	@ 55°C
117-500	50:5	—	2.4	—	—	—	—	2.0	2.0
117-750	75:5	—	2.4	2.4	—	—	—	2.0	2.0
117-101	100:5	—	1.2	2.4	4.8	—	—	2.0	2.0
117-151	150:5	C10	0.6	0.6	2.4	4.8	4.8	2.0	2.0
117-201	200:5	C10	0.6	0.6	1.2	2.4	4.8	2.0	2.0
117-251	250:5 *	C20	0.6	0.6	0.6	1.2	2.4	2.0	2.0
117-301	300:5 *	C20	0.3	0.3	0.6	1.2	2.4	2.0	2.0
117-401	400:5 *	C20	0.3	0.3	0.3	0.6	1.2	2.0	2.0
117-501	500:5 *	C20	0.3	0.3	0.3	0.3	0.6	2.0	1.5
117-601	600:5 *	C20	0.3	0.3	0.3	0.3	0.6	2.0	1.5
117-751	750:5 *	C50	0.3	0.3	0.3	0.3	0.3	1.5	1.33
117-801	800:5 *	C50	0.3	0.3	0.3	0.3	0.3	1.5	1.33
117-102	1000:5 *	C50	0.3	0.3	0.3	0.3	0.3	1.5	1.0
117-122	1200:5 *	C100	0.3	0.3	0.3	0.3	0.3	1.33	1.0
117-152	1500:5 *	C50	0.3	0.3	0.3	0.3	0.3	1.33	1.0
117-162	1600:5 *	C50	0.3	0.3	0.3	0.3	0.3	1.0	0.8
117-202	2000:5 *	C100	0.3	0.3	0.3	0.3	0.3	1.0	0.6
117-252	2500:5 *	C100	0.3	0.3	0.3	0.3	0.3	1.0	0.6
117-302	3000:5 *	—	0.3	0.3	0.3	0.3	0.3	1.0	0.6
117-322	3200:5 *	—	0.3	0.3	0.3	0.3	0.3	1.0	0.6
117-402	4000:5 *	—	0.3	0.3	0.3	0.3	0.3	0.8	0.6

\* Industry Canada Approval No. T-193

Models 112, 113, 114, 115 and 117

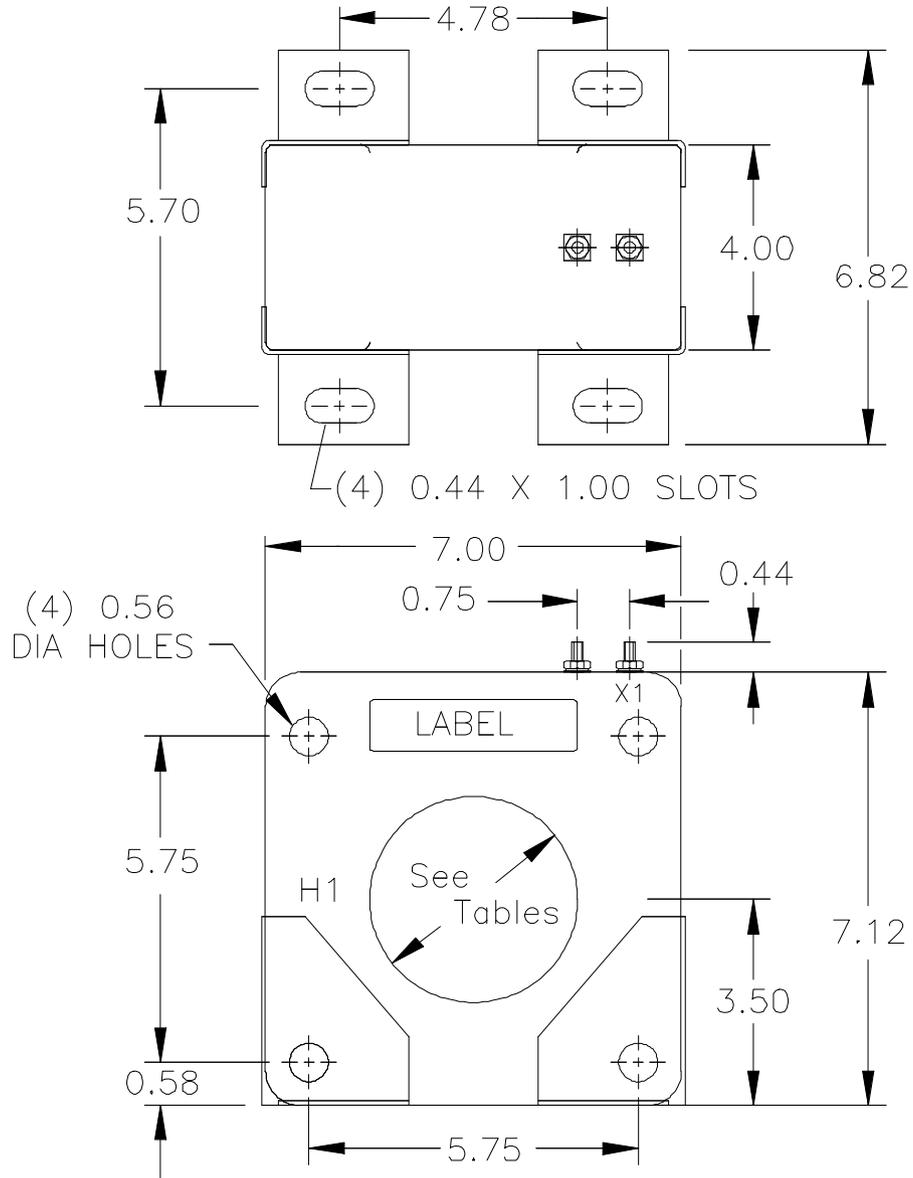

[GEGridSolutions.com](http://GEGridSolutions.com)

Grid-AIS-L4-ITL\_Model\_112\_117-1233-2017\_06-EN. © Copyright 2017. General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

**Worldwide Contact Center**

Web: [www.GEGridSolutions.com/contact](http://www.GEGridSolutions.com/contact)

Phone: +44 (0) 1785 250 070

USA and Canada: +1 (0) 800 547 8629

Europe, Middle East and Africa: +34 (0) 94 485 88 00

