

# Models 10WP & 189

## Current Transformers Wound Primary

### Application

Ammeters and wattmeters.

### Frequency

50-400 Hz.

### Insulation Level

0.6 kV, BIL 10 kV full wave.

### Continuous Thermal Current Rating Factor

1.33A at 30°C amb.,  
1.0A at 55°C amb

Approximate weight:  
Model 10WP - 1.5 lbs.  
Model 189 - 0.75 lbs



REGULATORY AGENCY APPROVALS  
 E93779  LR89403  
 Manufactured to meet the requirements of ANSI/IEEE C57.13.  
 Classified by U.L. in accordance with IEC 44-1

### Model 10WP

Catalog Number	Current Ratio	ANSI Metering Class at 60 Hz	
		BO.1	BO.2
10WP-0025	2.5:5	0.6	0.6
10WP-005	5:5	0.6	0.6
10WP-0075	7.5:5	0.6	0.6
10WP-010	10:5	0.6	0.6
10WP-015	15:5	0.6	0.6
10WP-020	20:5	0.6	0.6
10WP-025	25:5	0.6	0.6
10WP-030	30:5	0.6	0.6
10WP-040	40:5	0.6	0.6


### Model 189

Catalog Number	Current Ratio	ANSI Metering Class at 60 Hz	
		BO.1	BO.2
189-0025	2.5:5	0.6	0.6
189-005	5:5	0.6	0.6
189-0075	7.5:5	0.6	0.6
189-010	10:5	0.6	0.6
189-015	15:5	0.6	0.6
189-020	20:5	0.6	0.6
189-025	25:5	0.6	0.6
189-030	30:5	0.6	0.6
189-040	40:5	0.6	0.6
189-050	50:5	0.6	0.6
189-060	60:5	0.6	0.6
189-075	75:5	0.6	0.6
189-080	80:5	0.6	0.6
189-101	100:5	0.6	0.6




## Model 10WP Wound Primary

The Model 10WP is a low ratio wound primary current transformer, suitable for primary currents up to 40 amperes. The table lists the most common current ratings. Primary terminals for the Model 10WP are: for ratios of 25:5 and below, No. 8-32 brass studs with one flatwasher and regular nut, for ratios of 30:5 and above, 1/4-20 brass studs with one flatwasher, lockers and regular nut.

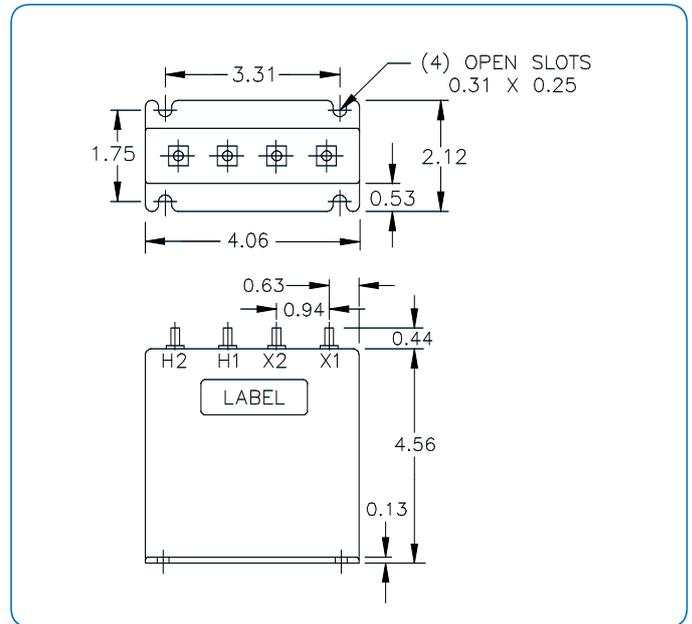

## Model 189 Wound Primary

The Model 189 is a low ratio wound primary current transformer, suitable for primary current up to 100 amperes. The table lists the most common current ratings. Primary terminals for the Model 189 for ratios of 30:5 and below are No. 10-32 brass screws with one lockwasher (Dimension A=3.28), for ratios 40:5 and above, 3/8-16 brass studs with one lockasher and regular nut (Dimension A=4.10).

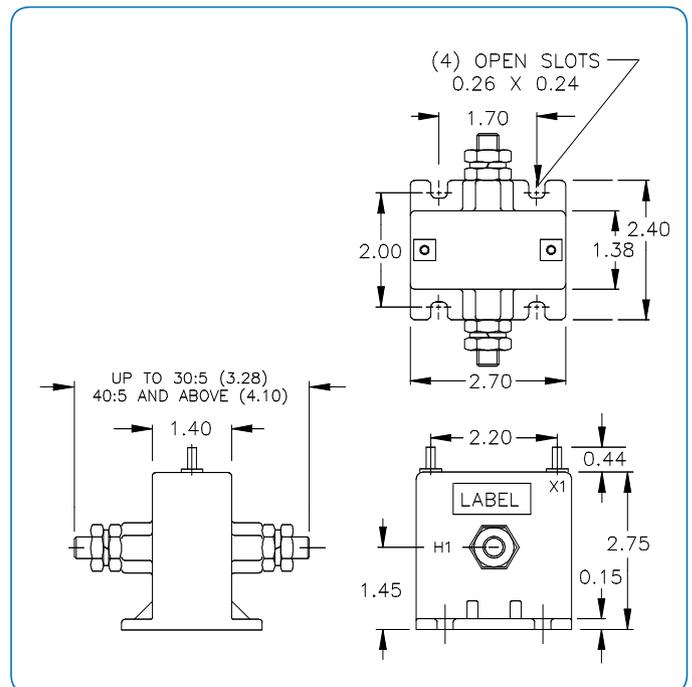

### GEGridSolutions.com

Grid-AIS-L4-ITL\_Model\_10WP\_189-1219-2017\_05-EN. © Copyright 2017. General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

### Worldwide Contact Center

Web: [www.GEGridSolutions.com/contact](http://www.GEGridSolutions.com/contact)

Phone: +44 (0) 1785 250 070

USA and Canada: +1 (0) 800 547 8629

Europe, Middle East and Africa: +34 (0) 94 485 88 00

