


**Item # 33377 SOCKET/FRONT CONN., Industrial 12 & 14 Pin Socket**

These industrial style sockets offer front-connected wiring on one level with screw terminals accessible and numbered for ease in installation, wiring and checkout. Sockets are polarized. The mating relay has a locking clip that snaps into the socket, eliminating any need for external holding devices.

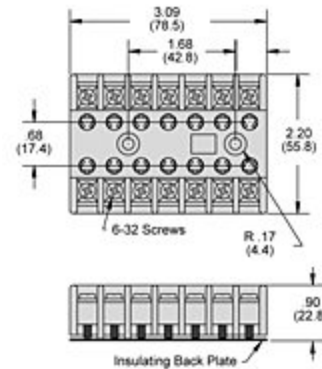

[Specifications](#) · [Construction](#) · [Electrical Rating](#) · [Temperature](#) · [Dielectric Strength](#) · [Miscellaneous](#)

**Specifications**

<b>Style</b>	14 Pin socket
<b>Weight</b>	120 g

**Construction**

<b>Protection Category (finger safe)</b>	IP20 IEC (D Series)
<b>Internal Metal Tracks</b>	Copper alloy, zinc plated
<b>Screws Terminals</b>	Steel, zinc plated
<b>Screw Style and Size</b>	Combination Head - M3.5x0.06x6.35MM
<b>Screw Terminals Torque Maximum</b>	9 lb-in, 1.01 Nm

**Electrical Rating**

<b>Nominal Voltage Rating</b>	600 V
<b>Nominal Current Rating</b>	10 A

**Temperature**

<b>Operating</b>	-40 to 80 °C
------------------	--------------

---

**Dielectric Strength**

<b>Output to Adjacent Output Terminals</b>	2000
<b>Output to Input Terminals</b>	2000 Vrms
<b>Terminals to Rail Chassis</b>	2000 Vrms

---

**Miscellaneous**

<b>Chassis Mount Screw Torque</b>	8- 10lb, 0.90 Nm
<b>Flammability Rating</b>	94V-0
<b>Wire Size</b>	20 -12 AWG, 0.5 - 3mm
<b>Body Color</b>	Light grey
<b>Din Locking Clip Color</b>	Red