

Model 781MR

Current Transformer with Multi-Ratio Window Diameter 6.50"

Application

Relaying and Metering.

Frequency

50-400 Hz.

Insulation Level

600 Volts, 10 kV BIL full wave.

Continuous Thermal Current Rating Factor

Secondary terminals are brass screws No. 10-32 with one flatwasher, lockwasher, accessible from either side.

Approximate weight 30 lbs.

Excitation data available upon request.




REGULATORY AGENCY APPROVALS



Manufactured to meet the requirements of ANSI/IEEE C57.13. Classified by U.L. in accordance with IEC 44-1

Model 781MR

Catalog Number	Relay Class	ANSI Metering Class at 60 Hz	Continuous Thermal Rating Factor	
			@30 °C	@55 °C
781-601MR	C100	0.3B0.5	2.0	1.5
781-122MR	C200	0.3B1.8	2.0	1.5
781-202MR	C200	0.3B1.8	2.0	1.5
781-302MR	C200	0.3B1.8	1.5	1.33
781-402MR	C200	0.3B1.8	1.0	0.8

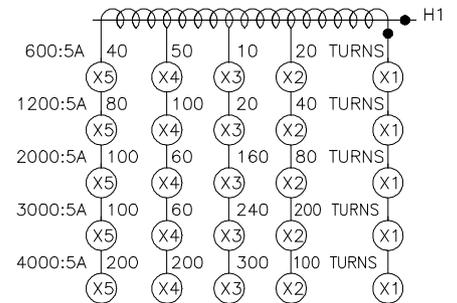

CONNECTION DIAGRAM



