

Model 786MR

**Current Transformer with Multi-Ratio
Window Diameter 6.50"**

Application

Relaying and Metering.

Frequency

50-400 Hz.

Insulation Level

600 Volts, 10 kV BIL full wave.

Continuous Thermal Current Rating Factor

Secondary terminals are brass screws No. 10-32 with one flatwasher, lockwasher, accessible from either side.

Approximate weight 58 lbs.

Excitation data available upon request.




REGULATORY AGENCY APPROVALS



Manufactured to meet the requirements of ANSI/IEEE C57.13.
Classified by U.L. in accordance with IEC 44-1

Model 786MR


Catalog Number	Relay Class	ANSI Metering Class at 60 Hz	Continuous Thermal Rating Factor	
			@30 °C	@55 °C
786-601MR	C200	0.3B0.9	2.0	1.5
786-122MR	C400	0.3B1.8	2.0	1.5
786-202MR	C400	0.3B1.8	2.0	1.5
786-302MR	C400	0.3B1.8	1.33	1.0
786-402MR	C400	0.3B1.8	1.33	1.0

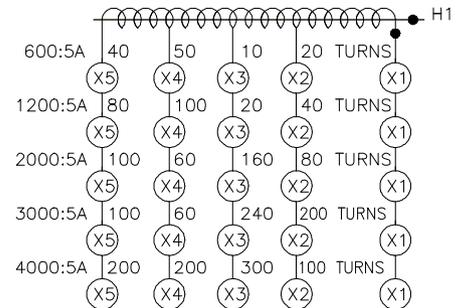

CONNECTION DIAGRAM



Model 786MR

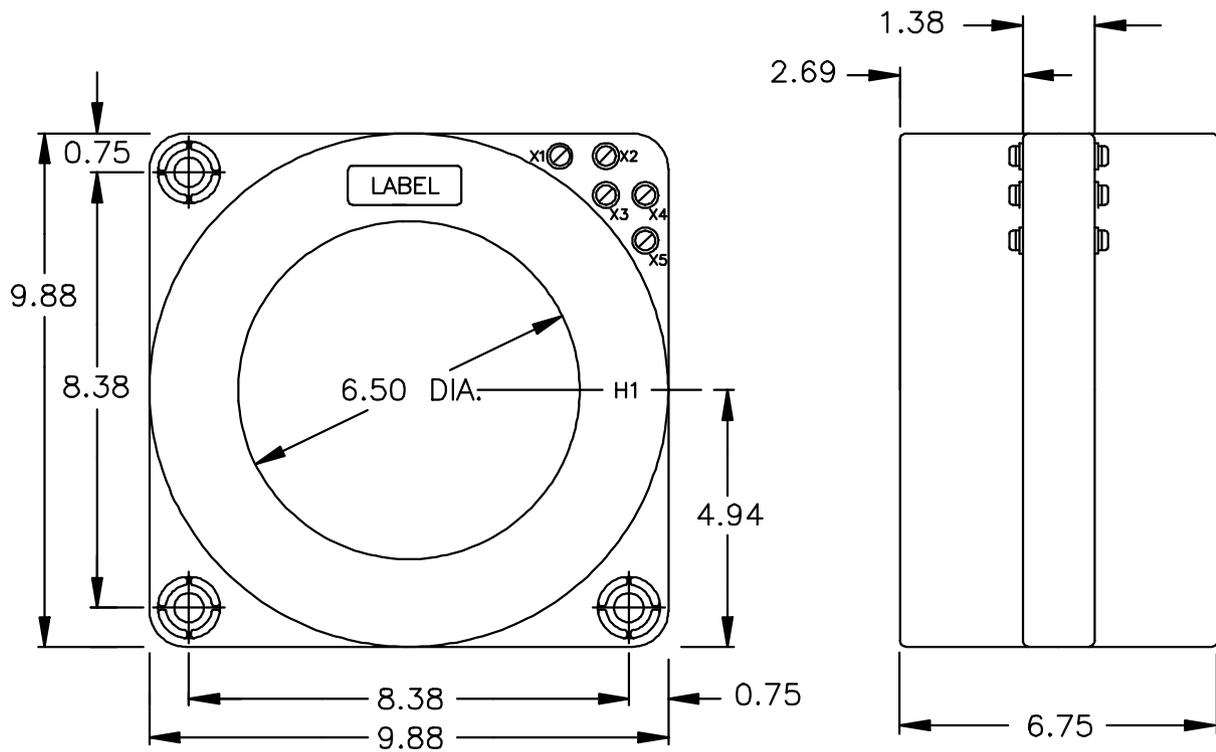

GEGridSolutions.com

Grid-AIS-L4-ITL_Model_786MR-1366-2017_06-EN. © Copyright 2017. General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

Worldwide Contact Center

Web: www.GEGridSolutions.com/contact

Phone: +44 (0) 1785 250 070

USA and Canada: +1 (0) 800 547 8629

Europe, Middle East and Africa: +34 (0) 94 485 88 00

