

# Model CPT3-60-3

## Medium Voltage Control Power Transformer

### Application

To provide control power in distribution equipment and motor starters.

### Frequency

60 Hz.

### Insulation Level

5 kV, 60 kV BIL full wave.

### Thermal Factor

3 kVA at 30°C ambient.

Primary terminals are brass screws No. 10-32 with one flatwasher and lockwasher or HV lead kit shown below.

Secondary terminals are brass screws 1/4-20 with one flatwasher and lockwasher.

Windings are encapsulated in epoxy resin.

Mounting base is steel.

Assembly is varnish coated.

Corrosion resistant mounting base provided.

For indoor use.

Approximate weight 85 lbs.



Shown without Fuses

### REGULATORY AGENCY APPROVALS



### Model CPT3-60-3



Unfused Catalog Number	Primary Voltage	Ratio	Secondary Voltage	Fused Catalog Number	Primary Fuse
CPT3-60-3-242-XXX	2400V	20:1	120V/240V	CPT3-60-3-242-FF	5E
CPT3-60-3-4161-XXX	4160V	34.7:1	120V/240V	CPT3-60-3-4161-FF	3E
CPT3-60-3-482-XXX	4800V	40:1	120V/240V	CPT3-60-3-482-FF	3E

NOTE: Last three digits of (unfused) catalog number signify lead length (in inches) of HV Lead Kit.  
eg 000 = no lead kit  
020 = 20" leads  
079 = 79" leads





# Model CPT3-60-3



## Connection Diagram

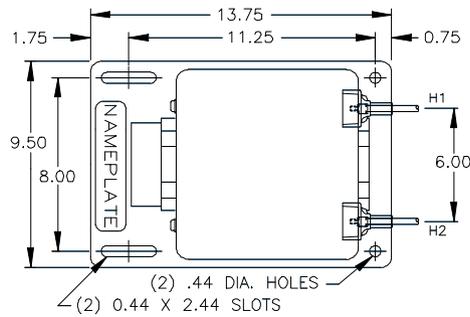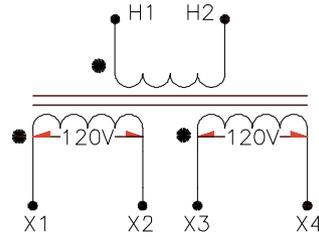

NOTE: Last three digits of (unfused) catalog number signify lead length (in inches) of HV Lead Kit.

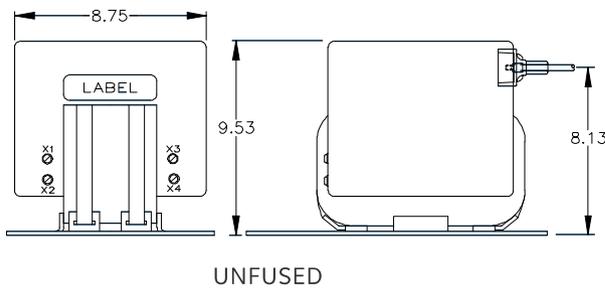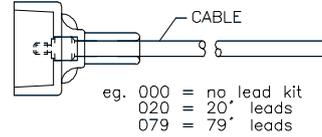

UNFUSED

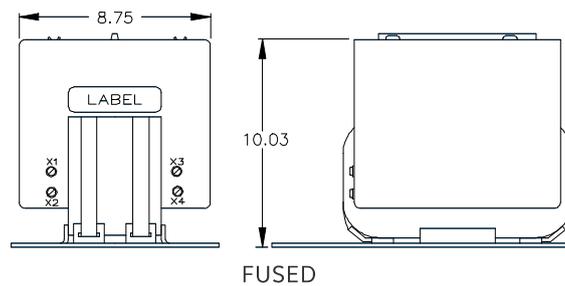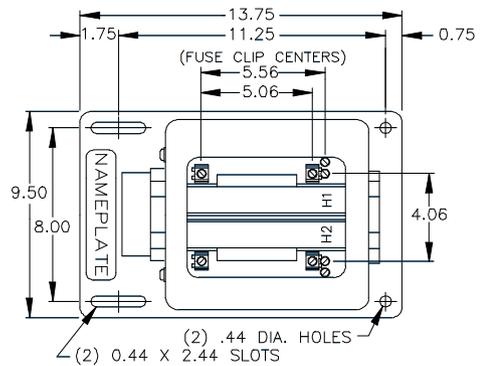

FUSED

## GEGridSolutions.com

Grid-AIS-L4-ITL\_Model\_CPT3\_60\_3-1088-2017\_08-EN © Copyright 2017. General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

### Worldwide Contact Center

Web: [www.GEGridSolutions.com/contact](http://www.GEGridSolutions.com/contact)

Phone: +44 (0) 1785 250 070

USA and Canada: +1 (0) 800 547 8629

Europe, Middle East and Africa: +34 (0) 94 485 88 00

