

Model JCW-0C

**Indoor/Outdoor Current Transformer
600 V, 10 kV BIL, 100-800 A, Window Diameters 1.125", 1.50", 2.00"**

Application

Designed for both indoor and outdoor service. Designed to provide high accuracy in applications with high metering secondary burdens. Suitable for operating meters and instruments, on both single phase two-wire circuits and polyphase circuits.

Weight

(approximate)

Transformer, without base

200:5	5.5 lbs
300:5	4.8 lbs
400:5	4.0 lbs
Low Base, add	0.5 lbs
High (EEI) Base, add	1.0 lbs

Reference Drawings

Outline	0121C44465
Bar Assembly (600-800A)	0821B38057
Bar Assembly (400A)	0821B38093
Bar Assembly (200-300A)	0821B38639
Bar Assembly (100A)	0821B38662
Low Base Assembly	0221A36157
High Base Assembly	0221A36158



Frequency

50-60 Hz

Insulation Level


0.6 kV; BIL 10 kV full wave

Model JCW-0C

Current Ratio (Amps) Pri : Sec	ANSI Accuracy Class, 60 Hz Burden Per ANSI			Continuous Thermal-Current Rating Factor		Window I.D. (inches)	Catalog Number (With Secondary Hardware and Cover)	Catalog Number (With Primary Bar)
	BO.1	BO.2	BO.5	30 °C Ambient	55 °C Ambient			
Without Base								
100:5	0.3	0.3	1.2	4.0	3.0	1.125	750X132623	750X132626
200:5	0.3	0.3	0.3	4.0	3.0	1.50	750X132638	750X132639
200:5	0.3	0.3	0.3	3.0	2.0	1.50	750X132203	750X132629
300:5	0.3	0.3	0.3	2.0	1.5	2.00	750X132206	750X132632
400:5	0.3	0.3	0.3	2.0	1.5	2.00	750X132204	750X132635
600:5	0.3	0.3	0.3	2.0	1.5	2.00	750X132616	750X132611
800:5	0.3	0.3	0.3	1.5	1.0	2.00	750X132620	750X132613
With Low Base								
100:5	0.3	0.3	1.2	4.0	3.0	1.125	750X132624	750X132627
200:5	0.3	0.3	0.3	4.0	3.0	1.50	750X132640	750X132641
200:5	0.3	0.3	0.3	3.0	2.0	1.50	750X132213	750X132630
300:5	0.3	0.3	0.3	2.0	1.5	2.00	750X132220	750X132633
400:5	0.3	0.3	0.3	2.0	1.5	2.00	750X132214	750X132636
600:5	0.3	0.3	0.3	2.0	1.5	2.00	750X132614	750X132612
800:5	0.3	0.3	0.3	1.5	1.0	2.00	750X132621	750X132618
With High (EEI) Base								
100:5	0.3	0.3	1.2	4.0	3.0	1.125	750X132625	750X132628
200:5	0.3	0.3	0.3	4.0	3.0	1.50	750X132642	750X132643
200:5	0.3	0.3	0.3	3.0	2.0	1.50	750X132223	750X132631
300:5	0.3	0.3	0.3	2.0	1.5	2.00	750X132226	750X132634
400:5	0.3	0.3	0.3	2.0	1.5	2.00	750X132224	750X132637
600:5	0.3	0.3	0.3	2.0	1.5	2.00	750X132617	750X132615
800:5	0.3	0.3	0.3	1.5	1.0	2.00	750X132622	750X132619



JCW-0C Dimensions

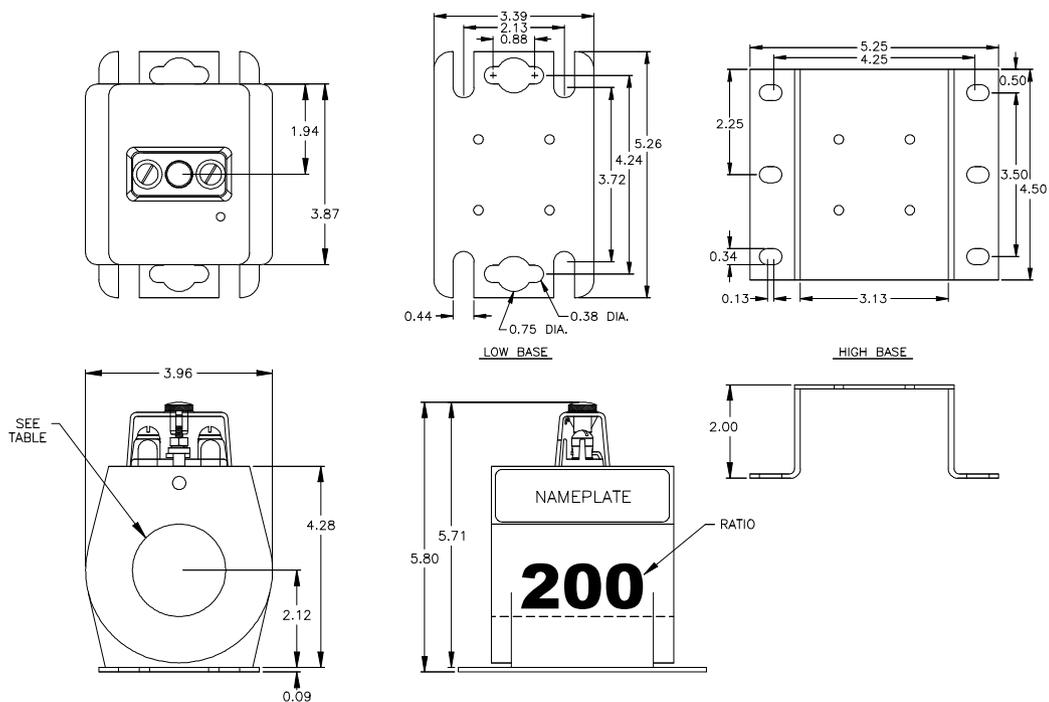

Construction and Insulation

The core and coil are encapsulated in polyurethane resin. This material has excellent electrical and mechanical properties over a wide temperature range and is resistant to oil and a variety of chemicals.

Core and Coils

The core is made from high quality grain oriented silicon steel, annealed under rigidly controlled factory conditions. The secondary winding is made of heavy enameled copper wire evenly distributed around the core for maximum accuracy and resistance to stray fields from adjacent conductors.

Terminals

Secondary terminals are tin plated brass, compression type with a 0.275" diameter cross-hole for wiring and a 1/4-28 clamp screw. A shorting device is provided and interlocked to the terminal cover. The terminal cover is made of a clear plastic. Provision is made for sealing the cover.

Polarity

The H1 polarity mark is molded into the transformer body above the window at one end. The X1 polarity mark is also molded into the body adjacent to the secondary terminal. They are identified with a white dot.

Primary Window

The window has ample size to accommodate cables of current-carrying capacity equal to, or greater than, the transformer's thermal current rating.

Primary Bars

Removable tin-plated copper primary bars are available for all ratings of the JCW-0C type transformer.

Nameplates

The nameplate is laser engraved aluminum. It is attached to the side of the unit and has provision for attaching the user's identifying tag. The nominal current rating is marked on the side of the unit in large numerals.

Baseplate and Mounting

The transformer can be mounted in any position and may be suspended from the bus-bar or cable. It has provision for attaching two optional bases. Bases are made from stainless steel. The high base increases the transformer height by two inches and meets the dimensions specified in ANSI C12.11

Maintenance

These transformers require no maintenance, other than occasional cleaning, if installed where air contamination is severe.

GEGridSolutions.com

Grid-AIS-L4-ITI_Model_JCW_OC-1407-2017_08-EN. © Copyright 2017. General Electric Company and Instrument Transformers LLC reserve the right to change specifications of described products at any time without notice and without obligation to notify any person of such changes.

Worldwide Contact Center

Web: www.GEGridSolutions.com/contact

Phone: +44 (0) 1785 250 070

USA and Canada: +1 (0) 800 547 8629

Europe, Middle East and Africa: +34 (0) 94 485 88 00

