

Limitron® fast-acting, RK1 - 250 volt fuses



Catalog symbol - KTN-R-(amps)

Description:

Advanced protection Class RK1 current-limiting, fast-acting fuses.

Specifications:

Ratings

- Volts:
 - 250 Vac
 - 250 Vdc (70-350 A)
- Amps 1-600 A
- · Interrupting rating:
 - 200 kA Vac RMS Sym.
 - 100 kA Vdc

Agency Information

- UL[®] Listed, Std. 248-12, Guide JDDZ, File E54273
- CSA® Certified, Class 1422-02, File 53787
- CE


Features:


- Provides 10X better current limitation to help prevent equipment damage caused by short-circuit events
- 200 kA interrupting rating complies with NEC® Section 110.9 for today's large capacity systems
- Fast-acting fuse helps prevent equipment damage caused by short-circuit events
- Incorporates Class R rejection feature. Can be inserted in non-rejection type fuse holders to physically and electrically replace Class H, K1, K5, and other fast-acting fuses
- Ideal for critical industrial or commercial applications that have specific current limitation requirements


Dimensions - in:














| Catalog numbers | | |
|-----------------|-----------|-----------|
| KTN-R-1 | KTN-R-30 | KTN-R-125 |
| KTN-R-2 | KTN-R-35 | KTN-R-150 |
| KTN-R-3 | KTN-R-40 | KTN-R-175 |
| KTN-R-4 | KTN-R-45 | KTN-R-200 |
| KTN-R-5 | KTN-R-50 | KTN-R-225 |
| KTN-R-6 | KTN-R-60 | KTN-R-250 |
| KTN-R-8 | KTN-R-70 | KTN-R-300 |
| KTN-R-10 | KTN-R-75 | KTN-R-350 |
| KTN-R-12 | KTN-R-80 | KTN-R-400 |
| KTN-R-15 | KTN-R-90 | KTN-R-450 |
| KTN-R-20 | KTN-R-100 | KTN-R-500 |
| KTN-R-25 | KTN-R-110 | KTN-R-600 |



Carton quantity and weight (250 vac)*

| Amps | Carton qty. |
|---------|----------------|
| 1–30 | 10 |
| 40-60 | 10 |
| 70–100 | 5 |
| 110–200 | 1 |
| 225–400 | 1 |
| 450-600 | 1 |

^{*}Contact Eaton's Bussmann Division for DC ratings.

Recommended fuse blocks

| Fuse amps | 1-pole | 2-pole | 3-pole |
|-----------|-------------|-------------|-------------|
| 0-30 — | HM25030-1 | HM25030-2 | HM25030-3 |
| 0-30 | RM25030-1 | RM25030-2 | RM25030-3 |
| 35-60 — | HM25060-1 | HM25060-2 | HM25060-3 |
| 35-60 | RM25060-1 | RM25060-2 | RM25060-3 |
| 70-100 | RM25100-1CR | RM25100-2CR | RM25100-3CR |
| 110-200 | RM25200-1CR | RM25200-1CR | RM25200-1CR |
| 225-400 | RM25400-1CR | RM25400-1CR | RM25400-1CR |
| 450-600 | RM25600-1CR | RM25600-1CR | RM25600-1CR |

For additional information on 250 volt blocks, see data sheet No. 10289 (RM250) and (HM250) and product brochure No. 3192 (RM style).


Fuse reducers for Class R fuses - 250 V

| Equipment fuse clips | Desired fuse (case) size | Catalog symbol (pairs) |
|----------------------|-----------------------------|---------------------------|
| 60 A | 30 A | NO.263-R |
| 100 A | 30 A | NO.213-R |
| | 60 A | NO.216-R |
| 200 A | 60 A | NO.226-R |
| | 100 A | NO.2621-R |
| 400 A | 100 A | NO.2641-R |
| | 200 A | NO.242-R |
| 600 A | 100 A | NO.2661-R |
| | 200 A | NO.2662-R |
| | 400 A | NO.2664-R [†] |

[†] Single reducer only (pair not required).


For additional information on Class R fuse reducers, see data sheet No. 1118.

Time-current curves — average melt

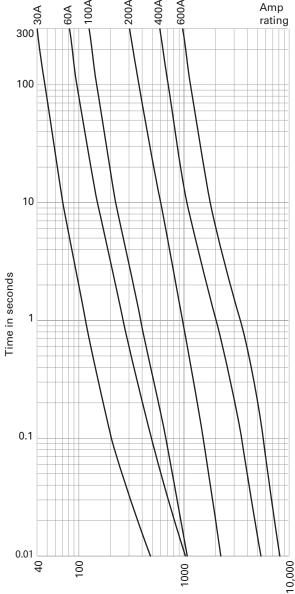

RMS symmetrical current in amps

Current-limitation curves

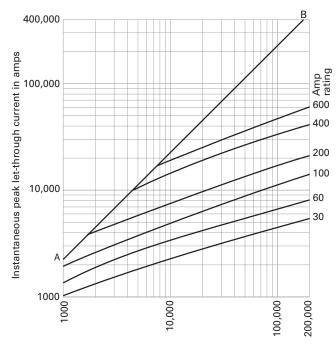

RMS symmetrical currents in amperes A-B=asymmetrical available peak (2.3 x symm. RMS amps)

The only controlled copy of this Data Sheet is the electronic read-only version located on the Eaton Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

Eaton

1000 Eaton Boulevard Cleveland, OH 44122 United States Eaton.com

Bussmann Division 114 Old State Road Ellisville, MO 63021 United States Eaton.com/bussmannseries

© 2016 Eaton All Rights Reserved Printed in USA Publication No. 1043 – SB02295 May 2016 Eaton, Bussmann and Limitron are valuable trademarks of Eaton in the US and other countries. You are not permitted to use the Eaton trademarks without prior written consent of Eaton.

CSA is a registered trademark of the Canadian Standards Group.

NEC is a registered trademark of the National Fire Protection Association, Inc.

UL is a registered trademark of the Underwriters Laboratories. Inc.

For Eaton's Bussmann series product information, call 1-855-287-7626 or visit: Eaton.com/bussmannseries

Follow us on social media to get the latest product and support information.











Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Eaton:

KTN-R-30 KTN-S-30 KTN-S-60 KTN-R-15 KTN-R-20